

Metal Halide Lamp

DI

10




Metal Halide Lamp


DI

	DI-2	DI-6	DI-12	DI-25	DI-40	DI-60	DI-120	DI-180	DI-120C	DI-180S	DI-180S P	DI-180S B
ランプ電圧 【V】	80	95	100	115	200	125	160	225	160	225	225	225
ランプ電力 【W】	200	575	1,200	2,500	4,000	6,000	12,000	18,000	12,000	18,000	18,000	18,000
点灯方向	BH ± 15°	BH ± 15°	BH ± 15°	BH ± 15°	BH ± 15°	BH ± 15°	BH ± 15°	BH ± 15°	BH ± 15°	BH ± 15°	BH ± 15°	BH ± 15°
色温度 【K】	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,200	5,800
全光束 【lm】	16,000	49,000	110,000	240,000	410,000	570,000	1,100,000	1,650,000	1,100,000	1,650,000	1,650,000	1,650,000
演色性 【Ra】	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
定格寿命 【hr】	300	750	750	500	500	300	300	300	300	300	300	300
外觀寸法 【mm】	A (管径)	14	24	30	37	42	56	78	78	78	78	78
	B (L1)	75	145	220	355	405	--	--	--	--	--	--
	C (L2)	58	115	180	290	340	450	470	500	470	470	470
概略図	Fig-1	Fig-2	Fig-2	Fig-3	Fig-3	Fig-4	Fig-4	Fig-4	Fig-4	Fig-4	Fig-4	Fig-4
口金	X515	SFc10-4	SFc15.5-6	SFa21-12	SFa21-12	25 × 51 LEAD 165mm	30 × 70 LEAD 165mm	30 × 70 LEAD 165mm	30 × 70 LEAD 165mm	30 × 70 LEAD 165mm	30 × 70 LEAD 165mm	30 × 70 LEAD 165mm
補足												

概略図

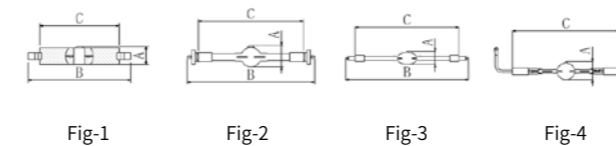

口金

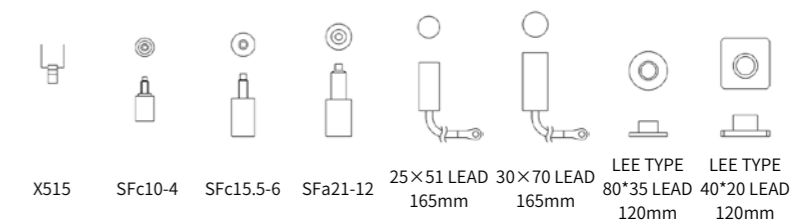

11