

## Metal Halide Lamp

### DIS / UV-CUT




6

## Metal Halide Lamp

### DIS

	DIS-1H	DIS-2H	DIS-4H	DIS-6H/H	DIS-6H_B	DIS-6H プリーズ	DIS-12H	DIS-12H_A	DIS-12H プリーズ	DIS-18H
ランプ電圧 [V]	80	70	70	95	95	95	100	100	100	150
ランプ電力 [W]	125	200	400	575	575	575	1,200	1,200	1,200	1,800
点灯方向	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY
色温度 [K]	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000
全光束 [lm]	8,400	15,000	32,000	49,000	49,000	49,000	110,000	105,000	110,000	160,000
演色性 [Ra]	>80	>90	>83	>90	>90	>90	>90	>90	>90	>90
定格寿命 [hr]	200	200	750	750	750	750	750	750	750	750
A (管径)	17	20	23	30	29	30	42	42	42	42
B (L1)	75	80	110	145	145	145	200	200	200	200
C (L2)	39	39	60	70	70	70	107	107	107	107
概略図	Fig-1	Fig-1	Fig-1	Fig-2	Fig-2	-	Fig-3	Fig-3	-	Fig-3
口金	GZX9.5	GZY9.5	GZZ9.5	G22	G22	-	G38	G38	-	G38
補足						BRIESE LIGHT 専用			BRIESE LIGHT 専用	




概略図

Fig-1

Fig-2

Fig-3

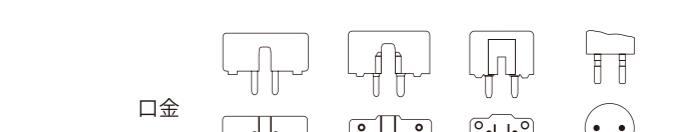

口金

GZX9.5

GZY9.5

GZZ9.5

G22

G38

7

## Metal Halide Lamp

### DIS / UV-CUT

	DIS-25H	DIS-25H_A	DIS-25H ブリーズ	DIS-40H/H	DIS-40H_A	DIS-40H ブリーズ	DIS-60H	DIS-90H VIVID	DIS-120H	DIS-120H(AC)	DIS-180H VIVID	DIS-25H UV-Cut	DIS-40H UV-Cut	
ランプ電圧 [V]	115	115	115	200	200	200	120	165	160	160	225	115	200	
ランプ電力 [W]	2,500	2,500	2,500	4,000	4,000	4,000	6,000	9,000	12,000	12,000	18,000	2,500	4,000	
点灯方向	ANY	ANY	ANY	ANY	ANY	ANY	BD ± 135	BD ± 135	BD ± 135	BD ± 135	BD ± 135	ANY	ANY	
色温度 [K]	6,000	6,200	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	5,600	5,600	
全光束 [lm]	220,000	240,000	220,000	380,000	420,000	380,000	600,000	825,000	1,100,000	1,100,000	1,650,000	220,000	380,000	
演色性 [Ra]	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	
定格寿命 [hr]	500	500	500	500	500	500	300	400	250	250	350	500	500	
A (管径)	60	60	60	75	75	75	85	85	103	103	103	60	75	
外観寸法 [mm]	B (L1)	240	240	240	255	255	255	360	360	450	450	470	240	255
C (L2)	127	127	127	142	142	142	210	210	255	255	260	127	142	
概略図	Fig-4	Fig-4	-	Fig-4	Fig-4	-	Fig-5	Fig-7	Fig-5	Fig-5	Fig-6	Fig-4	Fig-4	
口金	G38	G38	-	G38	G38	-	G38	G38	G38	G38	G51	G38	G38	
補足	BRIESE LIGHT 専用				BRIESE LIGHT 専用				ARRI COMPACT 専用				水平点灯時は 1000hr、 下向き点灯時は 500hr	

概略図




Fig-1




Fig-2




Fig-3




Fig-4



Fig-5



Fig-6




Fig-7

## Metal Halide Lamp

### DIS-UV-Block

	DIS-2H UV-Block	DIS-2H UV-B/DD	DIS-2H UV-B/K56	DIS-4H UV-Block	DIS-4H UV-B/K56	DIS-6H UV-Block	DIS-6H SPOTLIGHT UV-Block	DIS-8H UV-Block	DIS-12H UV-Block	DIS-16H UV-Block	DIS-25H UV-Block	DIS-40H UV-Block VIVID	DIS-60H UV-Block VIVID	DIS-120H UV-Block	
ランプ電圧 [V]	70	70	70	70	70	95	95	95	100	150	115	200	120	160	
ランプ電力 [W]	200	200	200	400	400	575	575	800	1,200	1,600	2,500	4,000	6,000	12,000	
点灯方向	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	
色温度 [K]	6,000	6,700	6,000	6,000	6,600	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	
全光束 [lm]	15,000	11,000	15,000	32,000	30,000	49,000	49,000	64,000	110,000	140,000	220,000	380,000	540,000	1,100,000	
演色性 [Ra]	>90	>90	>90	>85	>85	>90	>90	>75	>90	>90	>90	>90	>90	>90	
定格寿命 [hr]	200	200	200	750	750	1000	1000	750	750	500	1000	300	250		
A (管径)	20	20	20	23	23	31	30	31	42	40	60	75	85	103	
外観寸法 [mm]	B (L1)	80	90	90	110	110	145	145	145	200	175	240	255	360	450
C (L2)	39	52	52	60	60	70	70	70	107	85	127	142	210	255	
概略図	Fig-1	Fig-1	Fig-1	Fig-1	Fig-1	Fig-2	Fig-2	Fig-2	Fig-3	Fig-2	Fig-4	Fig-4	Fig-7	Fig-5	
口金	GZY9.5	GZY9.5	GZY9.5	GZZ9.5	GZZ9.5	G22	G22	G22	G38	G38	G38	G38	G38	G38	
補足	Dedelight 専用	K5600 Joker 専用	K5600 Joker 専用												

水平点灯時は  
1000hr、  
下向き点灯時は  
500hr

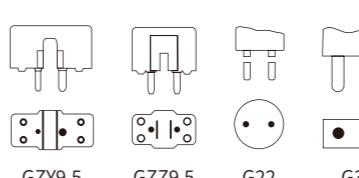

GZY9.5 GZZ9.5 G22 G38 G51