

Metal Halide Lamp
DIS / UV-CUT



6



Metal Halide Lamp
DIS

	DIS-1H	DIS-2H	DIS-4H	DIS-6H/H	DIS-6H_B	DIS-6H プリーズ	DIS-12H	DIS-12H_A	DIS-12H プリーズ	DIS-18H
ランプ電圧 【V】	80	70	70	95	95	95	100	100	100	150
ランプ電力 【W】	125	200	400	575	575	575	1,200	1,200	1,200	1,800
点灯方向	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY
色温度 【K】	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000
全光束 【lm】	8,400	15,000	32,000	49,000	49,000	49,000	110,000	105,000	110,000	160,000
演色性 【Ra】	>80	>90	>83	>90	>90	>90	>90	>90	>90	>90
定格寿命 【hr】	200	200	750	750	750	750	750	750	750	750
外観寸法 【mm】	A (管径)	17	20	23	30	29	30	42	42	42
	B (L1)	75	80	110	145	145	145	200	200	200
	C (L2)	39	39	60	70	70	70	107	107	107
概略図	Fig-1	Fig-1	Fig-1	Fig-2	Fig-2	-	Fig-3	Fig-3	-	Fig-3
口金	GZX9.5	GZY9.5	GZZ9.5	G22	G22	-	G38	G38	-	G38
補足						BRIESE LIGHT 専用		BRIESE LIGHT 専用		


7

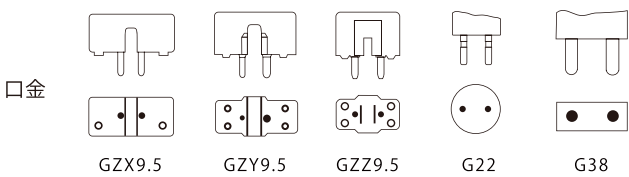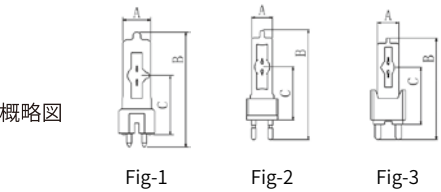

Metal Halide Lamp

DIS / UV-CUT

		DIS-25H	DIS-25H_A	DIS-25H プリーズ	DIS-40H/H	DIS-40H_A	DIS-40H プリーズ	DIS-60H	DIS-90H VIVID	DIS-120H	DIS-120H(AC)	DIS-180H VIVID	DIS-25H UV-Cut	DIS-40H UV-Cut
ランプ電圧 【V】		115	115	115	200	200	200	120	165	160	160	225	115	200
ランプ電力 【W】		2,500	2,500	2,500	4,000	4,000	4,000	6,000	9,000	12,000	12,000	18,000	2,500	4,000
点灯方向		ANY	ANY	ANY	ANY	ANY	ANY	BD ± 135	BD ± 135	BD ± 135	BD ± 135	BD ± 135	ANY	ANY
色温度 【K】		6,000	6,200	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	5,600	5,600
全光束 【lm】		220,000	240,000	220,000	380,000	420,000	380,000	600,000	825,000	1,100,000	1,100,000	1,650,000	220,000	380,000
演色性 【Ra】		>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
定格寿命 【hr】		500	500	500	500	500	500	300	400	250	250	250	500	500
外観寸法 【mm】	A (管径)	60	60	60	75	75	75	85	85	103	103	103	60	75
	B (L1)	240	240	240	255	255	255	360	360	450	450	470	240	255
	C (L2)	127	127	127	142	142	142	210	210	255	255	260	127	142
概略図		Fig-4	Fig-4	-	Fig-4	Fig-4	-	Fig-5	Fig-5	Fig-5	Fig-5	Fig-6	Fig-4	Fig-4
口金		G38	G38	-	G38	G38	-	G38	G38	G38	G38	G51	G38	G38
補足		BRIESE LIGHT 専用			BRIESE LIGHT 専用			ARRI COMPACT 専用						

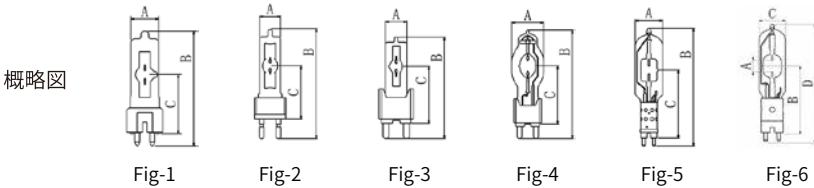

Metal Halide Lamp

DIS-UV-Block

		DIS-2H UV- Block	DIS-2H UV-B/ DD	DIS-2H UV-B/ K56	DIS-4H UV- Block	DIS-4H UV-B/ K56	DIS-6H UV- Block	DIS-6H SPOTLIGHT UV-Block	DIS-8H UV- Block	DIS-12H UV- Block	DIS-16H UV- Block	DIS-25H UV- Block	DIS-40H UV- Block VIVID	DIS-60H UV- Block VIVID	DIS-120H UV- Block
ランプ電圧 【V】		70	70	70	70	70	95	95	95	100	150	115	200	120	160
ランプ電力 【W】		200	200	200	400	400	575	575	800	1,200	1,600	2,500	4,000	6,000	12,000
点灯方向		ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY
色温度 【K】		6,000	6,700	6,000	6,000	6,600	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000
全光束 【lm】		15,000	11,000	15,000	32,000	30,000	49,000	49,000	64,000	110,000	140,000	220,000	380,000	540,000	1,100,000
演色性 【Ra】		>90	>90	>90	>85	>85	>90	>90	>75	>90	>90	>90	>90	>90	>90
定格寿命 【hr】		200	200	200	750	750	750	1000	1000	750	750	500	1000	300	250
外観寸法 【mm】	A (管径)	20	20	20	23	23	31	30	31	42	40	60	75	85	103
	B (L1)	80	90	90	110	110	145	145	145	200	175	240	255	360	450
	C (L2)	39	52	52	60	60	70	70	70	107	85	127	142	210	255
概略図		Fig-1	Fig-1	Fig-1	Fig-1	Fig-1	Fig-2	Fig-2	Fig-2	Fig-3	Fig-2	Fig-4	Fig-4	Fig-5	Fig-5
口金		GZY9.5	GZY9.5	GZY9.5	GZZ9.5	GZZ9.5	G22	G22	G22	G38	G22	G38	G38	G38	G38
補足		Dedolight 専用		K5600 Joker 専用		K5600 Joker 専用		水平点灯時は 1000hr、 下向き点灯時は 500hr							

