

Halogen Lamp
BSR



Halogen Lamp


BSR



Halogen Lamp

BSR

	BSR3-32	BSR6-32	BSR10-32	BSR10-32NH	BSR15-30L	BSR15-32L	BSR20-30/SC	BSR20-32/SC	BSR20-30L/SC
Lamp Voltage 【V】	100	100	100	100	100	100	100	100	100
Lamp Wattage 【W】	300	650	1000	1000	1500	1500	2000	2000	2000
Lighting Direction	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°
Color Temperature 【K】	3200	3200	3200	3200	3050	3200	3050	3200	3050
Total Luminous Flux 【lm】	8100	16800	27000	27000	34500	40500	46000	54000	46000
Color Rendering 【Ra】	50	100	200	150	400	200	500	300	500
Rating Life 【hr】	22.5	22.5	35	26	46	46	46	46	46
Outer Size 【mm】	A (Diameter)	90	90	125	122	210	210	175	175
	B (L1)	46.5	46.5	63.5	75	127	127	90	90
	C (L2)	Fig-1	Fig-1	Fig-2	Fig-4	Fig-3	Fig-3	Fig-2	Fig-3
Outline	C-13	C-13	C-13	C-13D	C-13	C-13	C-13	C-13	C-13
Base	GY9.5	GY9.5	G22	GX9.5	G38	G38	G22	G22	G38
Note									

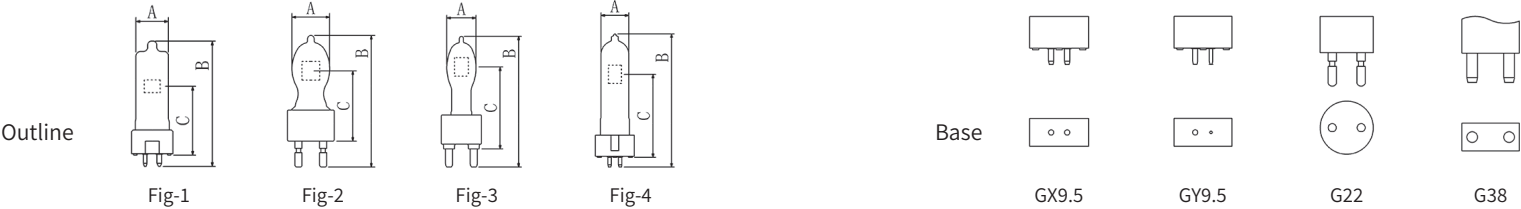

Halogen Lamp

BSR

	BSR20-32L/SC	BSR20-32NH/X	BSR30-30/SC	BSR30-32	BSR30-32LL	BSR50-30L/SC	BSR50-32L	BSR75-32M	BSR100-32M	BSR100-33M	BSR120-32M
Lamp Voltage 【V】	100	100	100	100	100	100	100	100	100	100	100
Lamp Wattage 【W】	2000	2000	3000	3000	3000	4400	5000	7500	10000	10000	12000
Lighting Direction	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 45°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°
Color Temperature 【K】	3200	3200	3050	3200	3200	3050	3200	3200	3200	3350	3200
Total Luminous Flux 【lm】	54000	54000	69000	81000	81000	115000	135000	202500	270000	330000	360000
Color Rendering 【Ra】	300	250	500	400	400	600	500	500	500	200	300
Rating Life 【hr】	46	31	51	51	65	65	65	85	85	85	85
Outer Size 【mm】	A (Diameter)	210	175	220	220	270	270	270	410	410	410
	B (L1)	127	90	127	127	165	165	165	254	254	254
	C (L2)	Fig-3	Fig-5	Fig-3	Fig-3	Fig-6	Fig-6	Fig-6	Fig-7	Fig-7	Fig-7
Outline	C-13	C-13D	C-13	C-13	C-13	C-13	C-13	C-13	C-13	C-13	C-13
Base	G38	G22	G38	G38	G38	G38	G38	G38	G38	G38	G38
Note											

