



Metal Halide Lamp
KSR / KSD



Metal Halide Lamp

KSR

	KSD250/2/SE	KSR575/2/SE	KSR700/2/SE	KSR700SA/60	KSR700/60/P28 EasyFit	KSR700/72/P28 EasyFit	KSR1000/60/P36 EasyFit	KSR1200SA/60	KSR1500/60/P50 EasyFit	KSR1700/60/P28 EasyFit	
Lamp Voltage 【V】	94	97	70	70	70	70	82	100	100	85	
Lamp Wattage 【W】	250	575	700	700	700	700	1,000	1,200	1,500	1,700	
Lighting Direction	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	
Color Temperature 【K】	9000	8000	6000	6,100	5,300	7,400	6,000	6,000	5,300	6,000	
Total Luminous Flux 【lm】	18000	49000	55000	58,000	58,000	50,000	90,000	96,000	130,000	150,000	
Color Rendering 【Ra】	60	80	70	70	85	76	85	80	85	90	
Rating Life 【hr】	2000	1000	1000	500	750	750	750	750	750	750	
Outer Size 【mm】	A (Diameter)	23	29	29	17	(18)21	(18)21	21	26	25	25
	B (L1)	108	125	155	85	112	112	112	133	130	123
	C (L2)	55	65	75	39	56	56	56	59	65	60
Outline	Fig-5	Fig-5	Fig-1	Fig-3	Fig-4	Fig-4	Fig-4	Fig-2	Fig-5	Fig-4	
Base	GY9.5	GX9.5	G22	GY9.5	PGJX28	PGJX28	PGJX36	GY22	PGJX50	PGJX28	
Note											

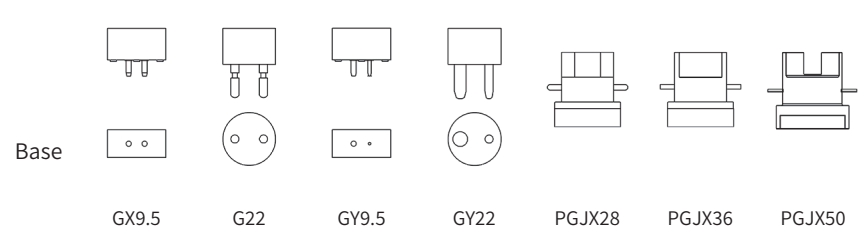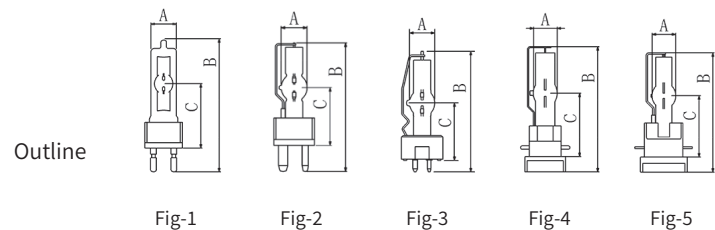

Metal Halide Lamp

KSR / KSD

	KSR575S/DE/70	KSR700S/DE/60	KSR700S/DE/72	KSR1200S/DE/60	KSR1200S/DE/72	KSR1500S/DE/60	KSD280/78 Diamond	KSD470 Diamond	
Lamp Voltage [V]	95	70	70	100	100	115	75	85	
Lamp Wattage [W]	575	700	700	1,200	1,200	1,500	280	470	
Lighting Direction	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	
Color Temperature [K]	7,000	6,000	7,200	6,000	7,200	6,000	7,800	8000	
Total Luminous Flux [lm]	40,300	54,000	51,000	105,000	103,000	130,000	16,800	30000	
Color Rendering [Ra]	80	75	75	90	75	90	75	80	
Rating Life [hr]	750	750	750	750	750	750	2000	1500	
Outer Size [mm]	A (Diameter)	20	18	(18) 21	22	21	22	51	60
	B (L1)	138	138	138	138	138	138	68	69
	C (L2)	115	115	115	115	115	115	-	-
Outline	Fig-1	Fig-1	Fig-1	Fig-1	Fig-1	Fig-1	Fig-2	Fig-2	
Base	SFc 10-4 With phase	SFc 10-4 With phase	SFc 10-4 With phase	SFc 10-4 With phase	SFc 10-4 With phase	SFc 10-4 With phase	-	-	
Note							Refer to the Fig-2 for Dim.	Refer to the Fig-2 for Dim.	

