
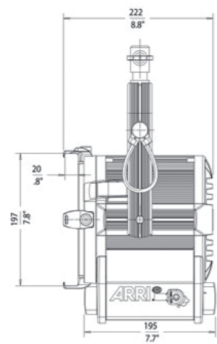


T1 1000W Location Fresnel

1000W Studio Fresnel ST1

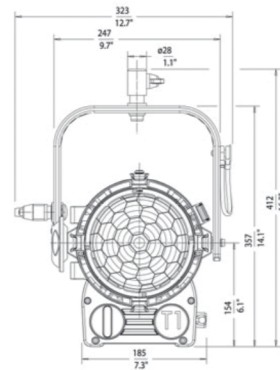

Part No.	Description
L3.39610.A	T1 1000W Location Fresnel Lamphead, manual, blue/silver (100V仕様)
L3.39615.A	T1 1000W Location Fresnel Lamphead, manual, black (100V仕様)
All the above are supplied with four leaf barndoor and filter frame.	

Accessories

L2.39670.0	Four Leaf Barndoor, black, rotatable, 197mm
L2.39700.0	Eight Leaf Barndoor, black, rotatable, 197mm
L2.79690.0	Filter Frame 197mm
L2.79680.0	Variable Snoot
L2.88013.0	Set of 4 Scrims (without bag)
L2.88913.1	Scrim bag
L2.76977.0	Large Kit Stand

Lamps

BSR10-30 (KOTO)
BSR10-32 (KOTO)

Specifications

Weight	5.5kg manual, 7.5kg pole op
Cable	3m with inline switch manual, 1.5m pole op
Lens Diameter	150 mm (5.9")
Reflector	Spherical specular high purity aluminium
Lampholder	G22
Mounting	Combination mount (16mm receptable (5/8") / 28mm (1 1/8") spigot) on manual versions, 28mm (1 1/8") spigot on pole op versions
Packed Size	390 x 390 x 360mm / 15.3 x 15.3 x 14.1"
Protection Class	IP23
Certification	NRTL-US-C, CE, TÜV GS, CB

Photometric Data with CP71 Lamp

Throw (m):	4	6	8
Spot: 10°	133450cd		
Output (lux)	8341	3707	2085
Diameter (m)	0.7	1.0	1.4
Medium: 30°	38700cd		
Output (lux)	2419	1075	605
Diameter (m)	2.1	3.2	4.3
Flood: 54°	20275cd		
Output (lux)	1267	563	317
Diameter (m)	4.1	6.1	8.2

Part No.	Description
L3.40500.A	ST1 1000W Studio Fresnel Lamphead, manual, blue/silver (100V仕様)
L3.40505.A	ST1 1000W Studio Fresnel Lamphead, manual, black (100V仕様)
All the above are supplied with four leaf barndoor and filter frame.	

Accessories

L2.39870.0	Four Leaf Barndoor, black, rotatable, 245mm
L2.39900.0	Eight Leaf Barndoor, black, rotatable, 245mm
L2.79890.0	Filter Frame 230mm
L2.79880.0	Variable Snoot
L2.88914.0	Set of 4 Scrims (without bag)
L2.88914.1	Scrim bag
L2.76990.0	Safety Cable
L2.89079.0	4m Operating Pole for pole-op fixtures
L2.88118.0	Barrel Clamp

Lamps

BSR10-30 (KOTO)
BSR10-32 (KOTO)

Specifications

Weight	7kg manual, 8kg pole op
Cable	1.5m
Lens Diameter	175 mm (6.9")
Reflector	Spherical specular high purity aluminium
Lampholder	G22
Mounting	28mm (1 1/8") spigot
Packed Size	460 x 400 x 400mm / 18.11 x 15.75 x 15.75"
Protection Class	IP23
Certification	NRTL-US-C, CE, TÜV GS, CB

Photometric Data with CP71 Lamp

Throw (m):	4	6	8
Spot: 10°	155225cd		
Output (lux)	9702	4312	2425
Diameter (m)	0.7	1.0	1.4
Medium: 30°	36325cd		
Output (lux)	2270	1009	568
Diameter (m)	2.1	3.2	4.3
Flood: 54°	16550cd		
Output (lux)	1034	460	259
Diameter (m)	4.4	6.7	8.9

