
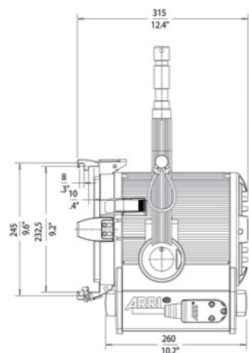


# T2 2000W Location Fresnel

# 2000W Studio Fresnel ST2

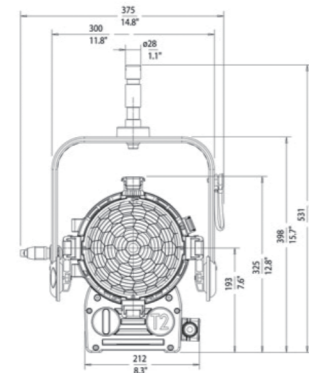

Part No.	Description
L3.41250.A	T2 2000W Location Fresnel Lamphead, manual, blue/silver (100V仕様)
L3.41255.A	T2 2000W Location Fresnel Lamphead, manual, black (100V仕様)
All the above are supplied with four leaf barndoor and filter frame.	

**Accessories**

L2.39870.0	Four Leaf Barndoor, black, rotatable, 245mm
L2.39900.0	Eight Leaf Barndoor, black, rotatable, 245mm
L2.79890.0	Filter Frame 230mm
L2.79880.0	Variable Snoot
L2.88914.0	Set of 4 Scrim (without bag)
L2.88914.1	Scrim bag
L2.88717.0	Cine Stand

**Lamps**

BSR20-30L/SC (KOTO)

BSR20-32L/SC (KOTO)

**Specifications**

Weight	7kg manual, 8kg pole op
Cable	3m with inline switch manual, 1.5m pole op
Lens Diameter	175 mm (6.9")
Reflector	Spherical specular high purity aluminium
Lampholder	G38
Mounting	28mm (1 1/8") spigot
Packed Size	460 x 400 x 400mm / 18.11 x 15.75 x 15.75"
Protection Class	IP23
Certification	NRTL-US-C, CE, TÜV GS, CB

**Photometric Data with CP71 Lamp**

Throw (m):	6	9	12
Spot: 12°	216600cd		
Output (lux)	6017	2674	1504
Diameter (m)	1.3	1.9	2.5
Medium: 30°	67625cd		
Output (lux)	1878	835	470
Diameter (m)	3.2	4.8	6.4
Flood: 57°	34475cd		
Output (lux)	958	426	239
Diameter (m)	6.5	9.8	13.0

Part No.	Description
L3.40750.A	ST2 2000W Studio Fresnel Lamphead, manual, blue/silver (100V仕様)
L3.40555.A	ST2 2000W Studio Fresnel Lamphead, manual, black (100V仕様)
All the above are supplied with four leaf barndoor and filter frame.	

**Accessories**

L2.40950.0	Four Leaf Barndoor, black, rotatable, 344mm
L2.40960.0	Eight Leaf Barndoor, black, rotatable, 344mm
L2.80970.0	Filter Frame 330mm
L2.80975.0	Variable Snoot
L2.88915.0	Set of 4 Scrim (without bag)
L2.88915.1	Scrim bag
L2.76990.0	Safety Cable
L2.89079.0	4m Operating Pole for pole-op fixtures
L2.88118.0	Barrel Clamp

**Lamps**

BSR20-30L/SC (KOTO)

BSR20-32L/SC (KOTO)

**Specifications**

Weight	10.5kg manual, 11.5kg pole op
Cable	1.5m
Lens Diameter	250 mm (10")
Reflector	Spherical specular high purity aluminium
Lampholder	G38
Mounting	28mm (1 1/8") spigot
Packed Size	550 x 510 x 510mm / 21.65 x 20.08 x 20.08"
Protection Class	IP23
Certification	NRTL-US-C, CE, TÜV GS, CB

**Photometric Data with CP71 Lamp**

Throw (m):	6	9	12
Spot: 9°	465700cd		
Output (lux)	12936	5749	3234
Diameter (m)	0.9	1.4	1.9
Medium: 30°	79875cd		
Output (lux)	2219	986	555
Diameter (m)	3.2	4.8	6.4
Flood: 52°	43125cd		
Output (lux)	1198	532	299
Diameter (m)	5.9	8.8	11.7

