

Ocean Master


An improvement in the ventilation effect,
Securing of ballast's safety

Illumination power is increased by 10% due
to the power loss reduction and suppressed
temperature rising

(compared with our products)




KD30EP

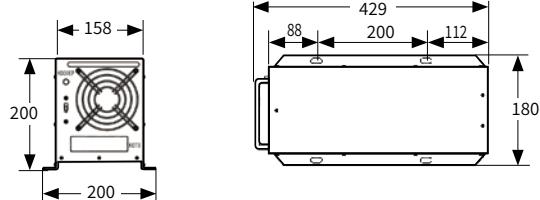

Specification

Input Voltage	220V
Frequency	60Hz
Input Current	19.0A
Power Consumption	4,000W
Open Circuit Voltage	305V
Short Circuit Current	23.5A
Weight	22kg

KD32EP


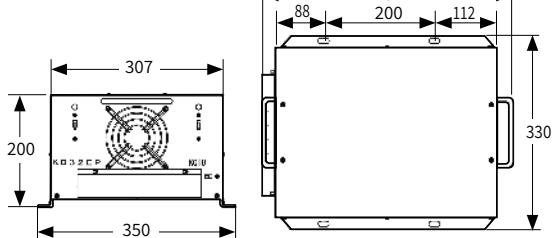


Specification

Input Voltage	220V
Frequency	60Hz
Input Current	19.0A × 2
Power Consumption	4,000W × 2
Open Circuit Voltage	305V × 2
Short Circuit Current	23.5A × 2
Weight	37kg

Ballast Series (60Hz)



KA22L



Specification	
Input Voltage	220V/240V
Frequency	60Hz
Input Current	9.5A×2/8.8A×2
Power Consumption	1,950W × 2
Open Circuit Voltage	400V × 2
Short Circuit Current	9.8A × 2
Weight	30kg



※Only 1 Power input

KE30P





Specification	
Input Voltage	220V
Frequency	60Hz
Input Current	13.8A
Power Consumption	2,900W
Open Circuit Voltage	307V
Short Circuit Current	15.5A
Weight	22kg

KE32P





Specification	
Input Voltage	220V/240V
Frequency	60Hz
Input Current	13.8A×2/12.7A×2
Power Consumption	2,900W × 2
Open Circuit Voltage	307V × 2
Short Circuit Current	15.5A × 2
Weight	33kg

KD30CP



Specification	
Input Voltage	220V
Frequency	60Hz
Input Current	14.7A
Power Consumption	3,150W
Open Circuit Voltage	305V
Short Circuit Current	18.4A
Weight	22kg

KD32P



Specification	
Input Voltage	220V
Frequency	60Hz
Input Current	14.7A × 2
Power Consumption	3,150W × 2
Open Circuit Voltage	305V × 2
Short Circuit Current	18.4A × 2
Weight	37kg

Ballast Series

KT50WH





Key Features

- 1.The ballast for the strongest bright lamp (MW50S-GH) in industry.
- 2.The brightness has increased by 20% compared to the previous one.
- 3.Dimmer can be used.



In addition to the current metal halide underwater light we have : MW50S-C (Normal 5kW)or newly developed MWS-G (High power 5kW).In case of a combination with the corresponding ballast : KT50WH (220V/60Hz),it will allow you to gather fish efficiently in a wide and brighter radius.

NEW KT50WH

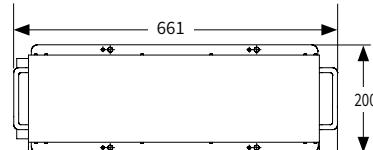



Specification	
Input Voltage	220V/240V
Frequency	60Hz
Input Current	26.7A/24.5A
Power Consumption	5,700W
Open Circuit Voltage	400V
Short Circuit Current	26.0A
Weight	約 26kg

KT50W



Specification	
Input Voltage	220V/240V
Frequency	60Hz
Input Current	22.8A/21.0A
Power Consumption	4,900W
Open Circuit Voltage	400V
Short Circuit Current	20A
Weight	約 26kg

KT100W





Specification	
Input Voltage	220V/240V
Frequency	60Hz
Input Current	45.0A/41.0A
Power Consumption	9,000W
Open Circuit Voltage	740V
Short Circuit Current	44.0A/40.0A
Weight	約 62kg

Ballast Series (50Hz)




Trust is Built on Performance

KV1515L






Specification	
Input Voltage	220V
Frequency	50Hz
Input Current	8.2A × 2
Power Consumption	1,500W × 2
Open Circuit Voltage	400V × 2
Short Circuit Current	7.1A × 2
Weight	約 27kg

KT32HP



Specification	
Input Voltage	220V
Frequency	50Hz
Input Current	18.5A
Power Consumption	3,300W × 2
Open Circuit Voltage	313V
Short Circuit Current	15.5A
Weight	44kg

KT41P

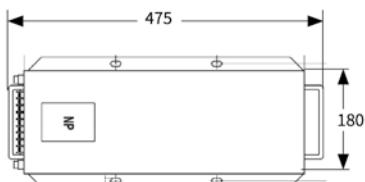

Specification	
Input Voltage	220V
Frequency	50Hz
Input Current	19A
Power Consumption	4,000W
Open Circuit Voltage	310V
Short Circuit Current	20A
Weight	25kg