

Halogen Lamp  
BSR




Halogen Lamp  
BSR




## Halogen Lamp

### BSR

	BSR3-32	BSR6-32	BSR10-32	BSR10-32NH	BSR15-30L	BSR15-32L	BSR20-30/SC	BSR20-32/SC	BSR20-30L/SC
定格電圧 【V】	100	100	100	100	100	100	100	100	100
ランプ電力 【W】	300	650	1000	1000	1500	1500	2000	2000	2000
点灯方向	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°
色温度 【K】	3200	3200	3200	3200	3050	3200	3050	3200	3050
全光束 【lm】	8100	16800	27000	27000	34500	40500	46000	54000	46000
定格寿命 【hr】	50	100	200	150	400	200	500	300	500
外観寸法 【mm】	A (管径)	22.5	22.5	35	26	46	46	46	46
	B (L1)	90	90	125	122	210	210	175	175
	C (L2)	46.5	46.5	63.5	75	127	127	90	90
概略図	Fig-1	Fig-1	Fig-2	Fig-4	Fig-3	Fig-3	Fig-2	Fig-2	Fig-3
フィラメント タイプ	C-13	C-13	C-13	C-13D	C-13	C-13	C-13	C-13	C-13
口金	GY9.5	GY9.5	G22	GX9.5	G38	G38	G22	G22	G38
補足									

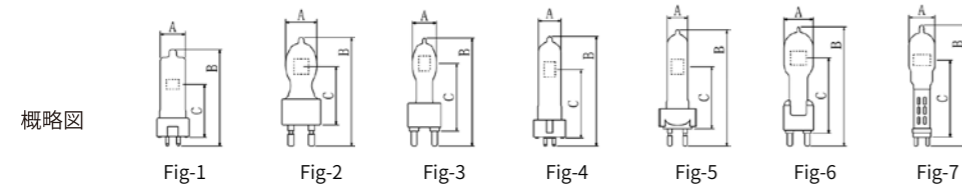

口金

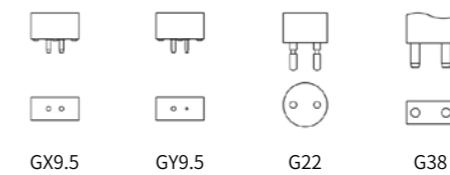

## Halogen Lamp

### BSR

	BSR20-32L/SC	BSR20-32NH/X	BSR30-30/SC	BSR30-32	BSR30-32LL	BSR50-30L/SC	BSR50-32L	BSR75-32M	BSR100-32M	BSR100-33M	BSR120-32M
定格電圧 【V】	100	100	100	100	100	100	100	100	100	100	100
ランプ電力 【W】	2000	2000	3000	3000	3000	4400	5000	7500	10000	10000	12000
点灯方向	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 45°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°
色温度 【K】	3200	3200	3050	3200	3200	3050	3200	3200	3200	3350	3200
全光束 【lm】	54000	54000	69000	81000	81000	115000	135000	202500	270000	330000	360000
定格寿命 【hr】	300	250	500	400	400	600	500	500	500	200	300
外観寸法 【mm】	A (管径)	46	31	51	51	65	65	85	85	85	85
	B (L1)	210	175	220	220	270	270	410	410	410	410
	C (L2)	127	90	127	127	165	165	254	254	254	254
概略図	Fig-3	Fig-5	Fig-3	Fig-3	Fig-6	Fig-6	Fig-6	Fig-7	Fig-7	Fig-7	Fig-7
フィラメント タイプ	C-13	C-13D	C-13	C-13	C-13	C-13	C-13	C-13	C-13	C-13	C-13
口金	G38	G22	G38	G38	G38	G38	G38	G38	G38	G38	G38
補足											