

# Halogen Lamp

JP




28

# Halogen Lamp


JP

	JP100V 500W/K-D	JP100V 750W/K-D	JP100V 1000WB/SC	JP100V 1000WC/SC	JP100V 1000WB/SB	JP100V 1000WC/SB	JP100V 1000W/K-D	JP100V 1500WB/SC	JP100V 1500WB/SB	JP100V 1500WC/SC	JP100V 1500WB/M	JP100V 1500WC/M	JP100V 1500W/K-D	JP100V 2000W/K-D	
定格電圧 [V]	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
ランプ電力 [W]	500	750	1000	1000	1000	1000	1000	1500	1500	1500	15000	1500	1500	2000	
点灯方向	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	BD ± 90°	
色温度 [K]	3125	3125	3050	3200	3050	3200	3125	3050	3050	3200	3050	3200	3125	3125	
全光束 [lm]	11000	17500	23000	27000	20000	23000	23300	34500	27000	40500	30000	32000	30000	46600	
定格寿命 [hr]	400	500	400	200	400	200	500	400	400	200	500	200	500	500	
外觀寸法 [mm]	A (管径)	22.5	25.5	35	35	36	36	25.5	41	41	41	41	41	30.5	30.5
	B (L1)	105	150	140	140	150	150	150	140	140	140	156	156	155	175
	C (L2)	55	85	85	85	85	85	85	85	85	85	85	85	85	90
概略図	Fig-1	Fig-2	Fig-6	Fig-6	Fig-7	Fig-7	Fig-2	Fig-2	Fig-2	Fig-6	Fig-5	Fig-5	Fig-3	Fig-4	
フィラメント タイプ	C-13D	C-13D	C-13	C-13	C-13	C-13	C-13D	C-13	C-13	C-13	C-13D	C-13D	C-13D	C-13D	
口金	GX9.5	GX16	GX16	GX16	GX16	GX16	GX16	GX16	GX16	GX16	GX16	GX16	GX16	G22	
補足															

概略図

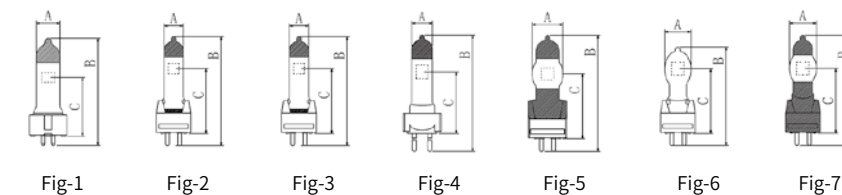

口金



29