

Fiilex

QUAD COLOR 5K Punch Light



QUAD Colorは1360WのLED光を生み出す非常にパンチのある灯体です。パワフルでありながらコンパクトなQUAD Colorは高耐久のフレームの中に4つのMatrixを収め、重量は34kg、1mに満たない大きさです。この合理化を求めて作られた灯体は簡単な設置・設定を目指して一体型の電源、配線、コントロール類(XLR5DMX入力含む)を搭載しています。この統合されたデザインによりQUAD Colorは通常のフロアスタンドへの設置やスタジオの吊り下げ運用などいかなる状況においても真価を発揮できます。



FEATURES

- ・最大5000Wのタングステン出力に相当(1360W)
- ・2000-10000KのCCT連続チューニング
- ・8/16bitカラーモード:
RGBW、エフェクト、HSI、
プリセットフィルター、CCT+HSI など
- ・全ての色温度帯において高いCRI値
- ・フリッカー・カラーシフトなしで0%まで調光可能
- ・一定品質の高い再現性を持った精確な色
- ・IP-x5(防滴)
- ・統合されたケーブル類と電源
- ・DMXコントロール
(内蔵コントローラーもしくはXLR5入力)
- ・市販のソフトボックス対応
- ・Quadフレネルレンズ使用可能(別売)
- ・レンズアクセサリによりさらに光量を上げることが可能(別売)

BEAM PROFILE

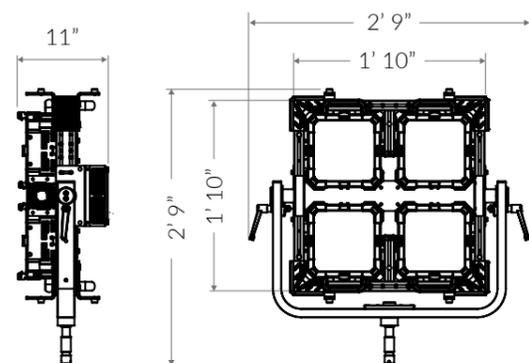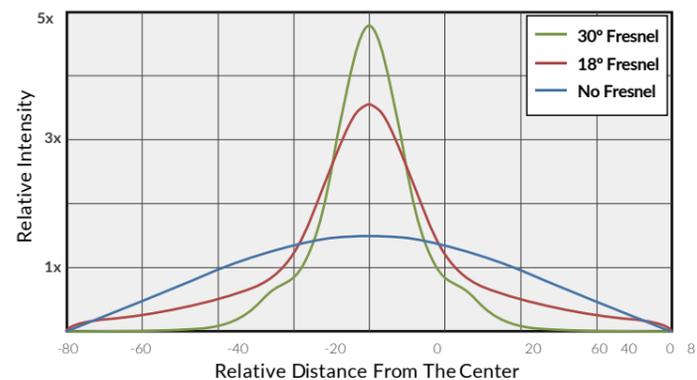


Fiilex

QUAD COLOR 5K Punch Light

SPECIFICATIONS

Beam Angle	100° (30° or 18° with fresnel accessories)
CCT Range	2000-10000K continuous tuning + magenta/green shift
CRI	95 typical
TLCI	90 typical
Control Modes	RGBW, CCT, HSI, Gel Presets, Effects, CCT + RGBW, CCT + HSI, CIE xy
Dimming	100 - 0%
Dimming Modes	Smooth, Sharp
Light Engine	DiCon Dense Matrix LED
Power Draw	1360W max
Max Intensity	~540fc (at 3m, 5600K)
AC Input	100-240V AC, 50-60Hz
DMX Interface	XLR5 & attached Fiilex DMX controller
Weight	75lbs / 34kg
Dimensions	2' 9" x 11" x 2' 9" / 84cm x 27cm x 82cm
Mount Type	Junior stud 1-1/8" male (28mm)

PHOTOMETRIC DATA

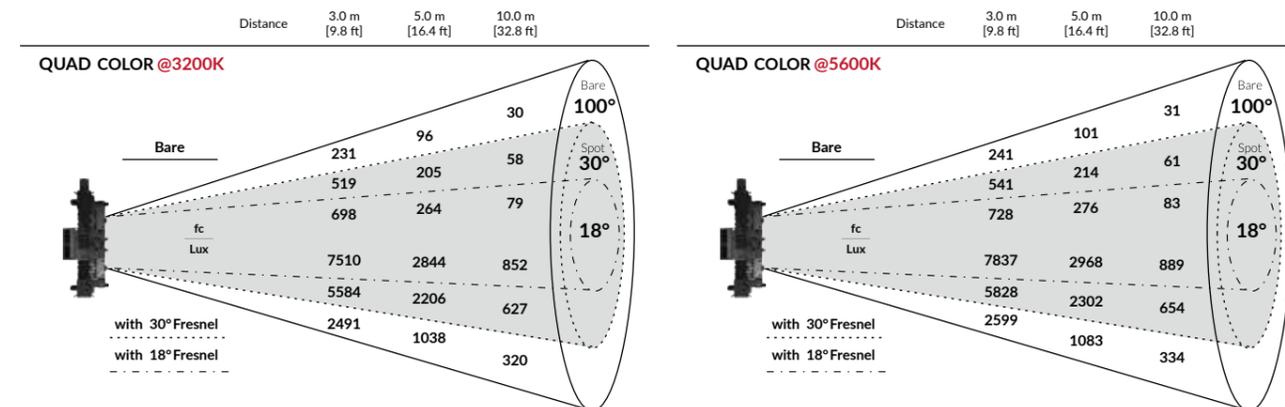

OPTIONAL ACCESSORIES & KITS

